


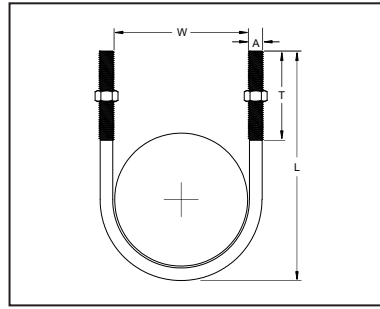

TGUB00UL00000

U BOLT

**APPLICATION:**

U-BOLTS are used to secure piping to structural members. When the piping is below the structural member, the U-Bolt provides vertical support and restricts lateral movement while allowing for axial movement. When the piping system is above the structural member, the U-Bolt restricts lateral movement and upward movement while allowing axial movement of the piping.

CONSTRUCTION:

U-Bolt is provided with two standard hex nuts and has a longer straight threaded length.

MATERIAL:

Mild Steel. Also other materials can be provided on request

APPROVALS:

ANSI/MSS SP-58 & SP-69(Type 24) 

Federal Specification WW-H-171E & A-A-1192A (Type 24)

MAXIMUM TEMPERATURE: 399°C (750°F)

FINISH AVAILABLE:

Plain, Electro-Galvanized, Hot Dip Galvanized & Zinc Flake.

PRODUCT CODE	NOMINAL IN.	PIPE SIZE MM	PIPE OD (MM)	MATERIAL DIMENSION			BOLT SIZE (MM) A	MAX LOAD (KG)
				ROD DIA. W	(MM) HEIGHT L	THREAD LENGTH T		
TGUB00ULE0027	3/4"	DN20	26.7	27	77	50	M10	550
TGUB00ULE0034	1"	DN25	33.4	34	85	50	M10	550
TGUB00ULE0042	1 1/4"	DN32	42.1	43	93	50	M10	550
TGUB00ULE0048	1 1/2"	DN40	48.2	48	100	50	M10	550
TGUB00ULE0060	2"	DN50	60.3	60	110	50	M10	550
TGUB00ULE0073	2 1/2"	DN65	73.0	76	127	50	M12	900
TGUB00ULE0089	3"	DN80	88.9	89	140	50	M12	900
TGUB00ULE0114	4"	DN100	114.3	115	165	50	M12	900
TGUB00ULE0141	5"	DN125	141.3	140	190	50	M12	900
TGUB00ULE0168	6"	DN150	168.3	168	220	50	M12	900

- Also can manufacture with different Rod size as per requirement.

NOTE : U bolt of all Non Standard Sizes to fit upon Rubber Support Insert can be manufactured.

APPLICATION EXAMPLES: