


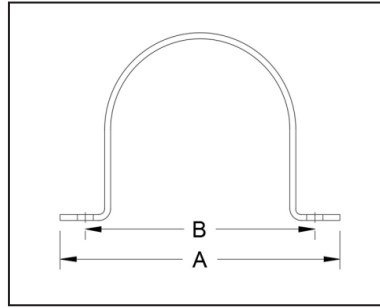

TGUS000000000

U STRAP

**APPLICATION:**

A standard pipe strap is recommended for supporting a piping system with fittings vertically or horizontally to walls or ceilings. It can be used as a restrainer when installed on top of structural wood beams for beam, for limiting pipe movements due to thrust loads during sprinkler system start-up.

CONSTRUCTION:

A standard Pipe Strap consists of a piece of mild steel shaped to hold the pipe down to walls or ceilings.

MATERIAL:

Mild Steel. Also other materials can be provided on request

APPROVALS:

ANSI/MSS SP-58 & SP-69 (Type 26) 

Federal Specification WW-H-171E & A-A-1192A (Type 26)

MAXIMUM TEMPERATURE: 343°C (650°F)

FINISH AVAILABLE:

Plain, Electro-Galvanized, Hot Dip Galvanized, Zinc Flake, & Epoxy Coated.

APPLICATION EXAMPLES:

PRODUCT CODE	NOMINAL IN.	PIPE SIZE MM	PIPE OD (MM)	HANGER DIMENSION (MM)		BOLT SIZE (MM)	MAX LOAD (KG)
				OVERALL DIMENSION A	DISTANCE BETWEEN TWO BOLT B		
TGUS0000E0022	1/2"	DN15	21.3	76	51	M8	500
TGUS0000E0027	3/4"	DN20	26.7	82	57	M8	500
TGUS0000E0034	1"	DN25	33.4	89	64	M8	500
TGUS0000E0042	1 1/4"	DN32	42.1	96	71	M8	500
TGUS0000E0048	1 1/2"	DN40	48.2	102	77	M8	500
TGUS0000E0054	-	-	54	108	83	M8	500
TGUS0000E0060	2"	DN50	60.3	114	89	M8	500
TGUS0000E0067	-	-	67	121	96	M8	500
TGUS0000E0073	2 1/2"	DN65	73.0	145	113	M8	600
TGUS0000E0082	-	-	82	152	120	M8	600
TGUS0000E0089	3"	DN80	88.9	160	128	M8	600
TGUS0000E0102	3 1/2"	DN90	101.6	170	138	M8	600
TGUS0000E0108	-	-	108	178	146	M8	600
TGUS0000E0114	4"	DN100	114.3	185	153	M8	600
TGUS0000E0126	-	-	126	196	164	M8	600
TGUS0000E0141	5"	DN125	141.3	210	178	M10	600
TGUS0000E0148	-	-	148	218	186	M10	600
TGUS0000E0155	-	-	155	225	193	M10	600
TGUS0000E0168	6"	DN150	168.3	237	205	M10	600
TGUS0000E0179	-	-	179	249	217	M10	600
TGUS0000E0190	-	-	190	260	228	M10	800
TGUS0000E0205	-	-	205	275	243	M10	800
TGUS0000E0219	8"	DN200	219.1	289	257	M10	800
TGUS0000E0230	-	-	230	300	268	M10	800
TGUS0000E0241	-	-	241	332	291	M12	1250
TGUS0000E0263	-	-	263	354	313	M12	1250
TGUS0000E0273	10"	DN250	273.0	364	323	M18	1250
TGUS0000E0295	-	-	295	386	345	M18	1250
TGUS0000E0323	12"	DN300	323.8	417	376	M18	1250
TGUS0000E0356	14"	DN350	355.6	447	409	M18	1800
TGUS0000E0374	-	-	374	465	427	M18	1800
TGUS0000E0406	16"	DN400	406.4	497	459	M18	1800
TGUS0000E0432	-	-	432	523	485	M18	1800
TGUS0000E0457	18"	DN450	457.2	547	509	M18	1800
TGUS0000E0482	-	-	482	573	535	M18	1800
TGUS0000E0508	20"	DN500	508.2	599	561	M18	1800
TGUS0000E0533	-	-	533	624	586	M18	1800
TGUS0000E0559	-	-	559	650	612	M18	1800
TGUS0000E0583	-	-	583	674	636	M18	1800
TGUS0000E0610	24"	DN600	609.6	701	663	M18	1800
TGUS0000E0658	-	-	658	766	721	M18	2300
TGUS0000E0690	-	-	690	798	753	M18	2300
TGUS0000E0760	-	-	760	868	823	M18	2300
TGUS0000E0863	-	-	863	971	926	M18	2300
TGUS0000E0918	-	-	918	1026	981	M18	2300

NOTE : U Strap of all Non Standard Sizes to fit upon Rubber Support Insert can be manufactured.